




DEV 3463/MAE – MODULO Equalizer

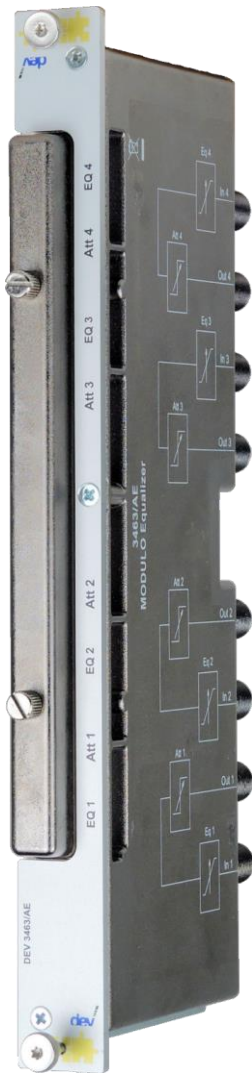

Features:

- ▀ Module 5 RU; 1 Slot
- ▀ In- and Outputs at the Rear
- ▀ Adjustable Attenuation
- ▀ Adjustable Slope
- ▀ Radiated Disturbance ClassA+10dB

4 *

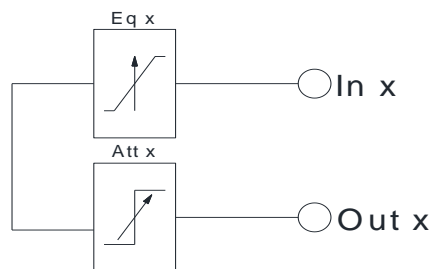

Technical Data DEV 3463/MAE

	Value	Condition
RF Specification		
Frequency Range	5...1218 MHz	
Impedance	75 Ohm	
Connectors	F (f)	
Damage Composite Input Level	139 dB μ V	
Flatness	≤ 0.2 dB	In any 8 MHz window
Return Loss (all Ports)	≥ 20 dB	5 ... 10 MHz
	≥ 20 dB	10 ... 1006 MHz
	≥ 18 dB	1006 ... 1218 MHz
Isolation between Paths	≥ 40 dB	5... 1218 MHz
General Specification		
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	
Operating Temperature	0...50 °C (32...122 °F)	
Storage Temperature	-40...+70 °C (-40...+158 °F)	
Storage Humidity	5...95 %	Non-condensing
Radiated Disturbance	EN 50083-2 ClassA+10dB	

Pad Information



Attenuator pads available for attenuation 0...15 dB in 1 dB steps



Equalizer pads available for slope 1.5...18 dB @ 1218/52 MHz in 1.5 dB steps

Order Information

Products	
DEV 3463/MAE	MODULO Equalizer; 5...1218 MHz; 75 Ohm, F (f); 4 Paths with Adjustable Attenuation and Adjustable Slope, 5 RU
DEV 3920/xxdB	25 Attenuator Pads; 5...1218 MHz; 0...15 dB in 1 dB Steps
DEV 3921/xxdBy	10 Linear Equalizer Pads; 1218/52 MHz; 1.5...18 dB in 1.5 dB Steps

Contact

DEV Systemtechnik GmbH
 Grüner Weg 4A
 61169 Friedberg
 GERMANY
 Phone: +49 6031 6975 100
 Fax: +49 6031 6975 114
 info@dev-systemtechnik.com
 www.dev-systemtechnik.com

Rev. 07-Dec-2017

Technical specifications are subject to change